







ECONOMY LED MONITOR

















23REDE

BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY

OVERVIEW

The ORION LCD w/ LED BLU (backlight unit) high brightness displays are a truly professional experience in next generation technology using eco-friendly material (no mercury or halogen). This technology exceeds the NTSC color gamut standard of 100% with the LED BLU at 123% to provide a wider range of colours than ever before - you will see colors on screen as you see them in real world.

FEATURES

- 1920 x 1080p Full HD Display Resolution
- DBNC Video 2 In / 2 Out, S-Video 1 In, HDMI 1 In / VGA 1 In, PC Stereo 1 In
- LED BLU (Back Light Unit) Display Monitor
- 5ms Response, 250 NITS, 1000:1 Contrast Ratio
- Auto Color Balance Function
- Mount Options: Wall, Ceiling









SPECIFICATIONS


| | 23REDE |
|--|---|
| Display | |
| Screen Size | 23 Inch |
| Max. Resolution | 1920 x 1080 @ 60Hz |
| Pixel Pitch | 0.265 x 0.265mm |
| Brightness | 250cd/m² |
| Contrast Ratio | 1000 : 1 |
| Aspect Ratio | 16:9 |
| Viewing Angle (H/V) | 170° / 160° |
| Display Color | 16.7 Million |
| Response Time | < 5ms |
| Video System | NTSC / PAL |
| Interface | |
| Video In / Out (BNC Type) | 2 ln / 2 Out |
| HDMI In | 1 ln |
| S-Video In / Out | 1 In |
| VGA In (15Pin D-Sub) | 1 In |
| Audio In (RCA Type) | 1 In |
| PC Stereo In | 1 In |
| Transmitter | |
| Remote Control | Yes |
| Audio | 163 |
| Built-in Speakers | Yes (1W x 2) |
| Features | 163 (1W X Z) |
| Filter Type | 3D Motion Adaptive De-Interlace |
| Auto Source Sequencing | Yes |
| Multi Language | English, Dutch, Spanish, French, Korean |
| General | English, Dutch, Spanish, French, Rolean |
| Outline Dimension (W x H x D) | 22.83" x 16.14" x 6.70" |
| Net Weight | 4.99Kg (11.02 lbs) |
| Material / Color | ABS Plastic / Black |
| Desk Top Stand | Tilt Back |
| Part / Labor | 3year / 3year |
| Consumption: < On | < 35W |
| Consumption: < On | AC100 ~ 240V(50/60Hz) |
| Electrical Ratings | DC12V / 3.5A |
| Operating Temperature | 0° ~ 40° C / 32° ~ 104° F |
| Storage Temperature | -20° ~ 60° C / -4° ~ 140° F |
| Mounts | -20 - 00 C/-4 ~ 140 F |
| Wounts VESA™ Mount Size | 100 x 100mm |
| | |
| Wall | WB-5, WB-10, WB-30, WB-31 |
| Ceiling *Design and specifications are subject to change wit | CMK-01 |

TILT CAPABILITY


REDE series has flexible tiltable desktop stand capability



INPUT INTERFACE

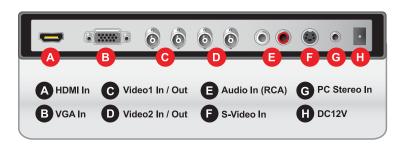

DIMENSIONS

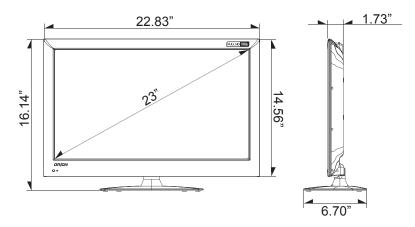

OPTIONAL MOUNTS





