
HZ21X1015V

Туре		AI ZOOM	Mount		С	1/2"
Focal Length		10~210mm	Back Focus		13.91mm	
Fno.		F1.5	Mechanica	ıl Bf	17.5mm	
Designed Image Format		1/2"(4.8x6.4mm)	Exit Pupil		-108.05mm	
	Iris	F1.5-F1000	Filter Size		M72x0.75mm	
Operation Range	Focus	2m ~ infinity	A = = = +	Front	Ø –	
	Zoom	10~210mm	Aperture Rear		Ø –	1
	Iris	DC Motor		•		
Control	Focus	DC Motor	Dimension		94.5x84x169mm	CC
	Zoom	DC Motor	Weight		1,100 g	
Object Size at MOD	Wide	896 x1202mm				
Object Size at MOD	Tele	44.6 x 59.0mm				
Field of View	D	_		_		
	Н	1/2" 35.6°~1.78°	1/3" 26.8°~1.35° 20.2°~1.02°			1
	V	26.8°~1.35°				
Control		Iris	Focus		Zoom	
Driving Coil/Supply Volt.		182Ω	DC 6-12V		DC 6-12V	
Damping Coil/Current		1145Ω	60mA or less		60mA or less	
Response Time		1 - 2 sec.	1 - 2 sec.		1 - 2 sec.	
Potentiometer		_	_		_	
Light Measuring Method		Average to Peak(Factory set at Average)				
Input Signal		Video Signal (V or VS)				
Iris Accuracy		±15% at Video Signal Level				
Sensitivity Adjustment		0.4~1.0Vp-p(Video Signal)				
Operating Temperature		-10 ~ +50 degree C				

DIMENSIONS

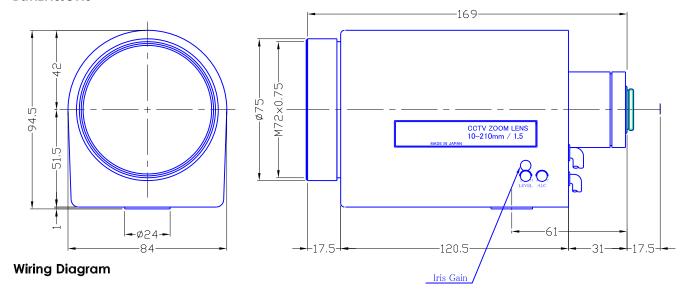

1) 3-core Cable for Auto Iris

1, 5 core cas			
RED	+ 12 V		
WHITE	Video		
BLACK	GND		

2) 4-core Cable for Focus / Zoom Control

Black	Focus	(+)	Far to Near	(-)	Near to Far
Green	Focus	(-)	Far to Near	(+)	Near to Far
Yellow	Zoom	(+)	Wide to Tele	(-)	Tele to Wide
Red	Zoom	(-)	Wide to Tele	(+)	Tele to Wide