


For Security Vari-Focal



YV2.7×2.2SA-2






















- High image-quality monitoring with optical performance supporting 3 megapixels.
 WIDE 2.2mm, achieving a horizontal field angle of 120 degrees
- (when used on 1/3 cameras).
- Compact and lightweight design, best suited for use with dome cameras.
- Designed to maximize optical performance with high-accuracy aspheric lens, low-dispersion glass, and high refractive-index glass.

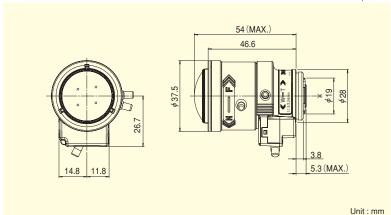

Iris Ranç Operation			
Operation	70		F1.3 ~ Close
Operation	Zoom		Manual
	Focus		Manual
	Iris		Manual
Angle Of View (HXV)	1/3"	WIDE	120°00′ × 91°36′
		TELE	46°26′ × 34°59′
	1/4"	WIDE	91°36′ × 69°21′
		TELE	34°59′ × 26°18′
Focusing Range (From Front Of The Lens) (m)			∞ ~ 0.3
Object Dimensions at M.O.D. (HXV) (mm)	1/3"	WIDE	1075 × 638
		TELE	266 × 196
	1/4"	WIDE	638 × 429
		TELE	196 × 145
Back Focal Distance (in air) (mm)			7.70
Exit Pupil Position (From Image Plane) (mm)			-452
Filter Thread (mm)			_
Mount			CS
Mass (g)			55
Remarks			· With Metal Mount





